

Industrial pressure transmitters

Series IDA3X3

3-wire technology

Description

Due to modern diaphragm and amplifier technology, these transducers are intended for use in the hardest industrial applications.

Specializing in dynamic, pulsating hydraulic pressure regulation for injection moulding machines and presses, they have for more than 20 years proven their excellent accuracy and long term stability.

Automotive cranes, industrial robots, concrete pumps, in-

dustrial test purposes and off-shore business are further installation possibilities with high demands with respect to accurate pressure, vibration and shock resistance, as well as weatherproofing.

The flush diaphragm version IDA 37X is designed for applications requiring a zero volume pressure port in measurement of gases, viscous liquids and slurries and has excellent cleanability.

Features

- Stainless steel construction withstands harsh operating environments and corrosive media
- Contoured diaphragm ensures greater accuracy, repeatability and fatigue strength
- Optimum diaphragm heat treatment contributes a longer operating life
- Internal Shunt-Calibration provides quick transducer and system calibration
- Potted electronics resists shock and vibration



Technical Data / Operating Data

Pressure range	0 - 20* bar to 0 - 1000 bar	Burst pressure	4 x pressure range
Accuracy	± 0.25 % f.s.v. ± 0.5 % for IDA373	Material in contact with media	3 x pressure range at 0 - 20 bar and 0 - 1000 bar
Repeatability	± 0.1 % f.s.v.		
Resolution	infinite		
Response	0.8 kHz (-3dB)		

* 20 bar range only with 35 bar element and option D30/20 calibration 20 bar range

Electrical Characteristics

Configuration	4-arm Wheatstone bridge strain gauge (DMS)	Zero adjustment	± 5 % f.s.v.
Strain resistance	350 Ω	Supply voltage	10 - 32V DC / 15 - 32V DC
Output signal	0 - 5 V DC / 1 - 6 V DC / 0 - 10 V DC / 1 - 11 V DC	Internal Shunt-Calibration	80 % f.s.v. ± 5 %
Load resistance	> 5 kΩ / 5 kΩ > 10 kΩ / > 10 kΩ	Span adjustment	± 5 % f.s.v.
		Leakage resistance	1000 MΩ at 50 V DC

Temperature influence

Max. media temperature 85 °C

Max. operating temperature 85 °C

Zero shift due to temperature change


± 0.1 % f.s.v. / 10 °C
IDA373 ± 0.4 % f.s.v. / 10 °C

Sensitivity shift due to temperature change


± 0.2 % f.s.v. / 10 °C
IDA373 ± 0.4 % f.s.v. / 10 °C

Dimensions


IDA333

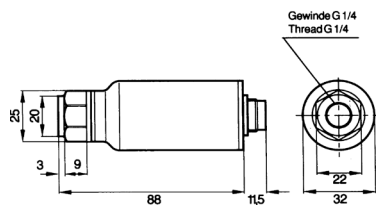

IDA353

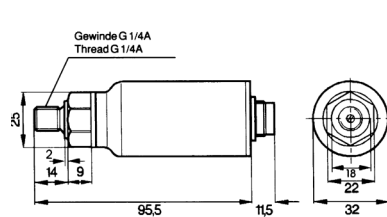

IDA373

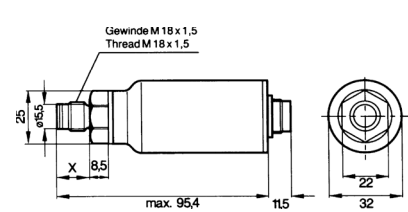

Order specifications

IDA3X3 - XXXX - XXX - XXX

Pressure side connection

3 = Internal thread ISO 228/1-G1/4
5 = External thread DIN 3852-AG1/4A
7 = M18 x 1.5 flush diaphragm

Pressure range

(20* = 0 - 20 bar) **2C** = 0 - 200 bar
35* = 0 - 35 bar **3,5C** = 0 - 350 bar
50 = 0 - 50 bar **5C** = 0 - 500 bar
1C = 0 - 100 bar **7C** = 0 - 700 bar
1,5C = 0 - 150 bar **1M** = 0 - 1000 bar

* only for IDA372, 20 bar range only with option D30/20 calibration 20 bar range

Options

D05 = Cable connection
D06 = Cable connector IP65
D21 = Bendix-Connector
D30 = Special calibration for IDA with amplifier

Output voltage

5V = 0 - 5 V DC
6V = 1 - 6 V DC
10V = 0-10 V DC
11V = 1-11 V DC