

DYNISCO MODEL PT467E-M10

Small Diameter Diaphragm Melt Pressure Transducer for Space Restricted Areas

Description

Model PT467E - M10 features a small, 6 mm sensing element that is ideal for use in space restricted areas or on small extruders or rheometers. Model PT467E - M10 is similar to the model PT462E - M10 yet features a 0.06" diameter exposed capillary to allow 1/16" radius bends in applications where

Features

- 6 mm sensing element
- Exposed, bendable capillary
- Internal 80% shunt calibration
- 0 - 5,000 to 0 - 10,000 psi
- Good stability and repeatability
- Flexible stem
- Classic, standard design

Benefits

- Fits in space restricted areas
- Ideal for injection molding nozzles
- Easy set - up
- Choice of pressure ranges
- Proven sensor design
- Easy to install, ideal for high local temperatures
- Economically priced



Specifications

Performance Characteristics

Ranges (psi): 0 - 5,000, 0 - 7,500, 0 - 10,000
Accuracy: $\pm 1.0\%$ FSO
Repeatability: $\pm 0.2\%$ FSO
Mounting torque: 500 inch - lbs. maximum

Maximum pressure: 2 x full range
Material in contact with pressure media: Inconel 718
Weight: 1.5 lbs.

Electrical Characteristics

Configuration: Four active arm bonded Wheatstone bridge strain gage
Bridge resistance: *Input:* 345 Ohms minimum; *Output:* 350 Ohms $\pm 10\%$
Full scale output: 3.33 mV/V $\pm 2.0\%$

Zero balance: $\pm 10\%$ full scale
Excitation: 10 Vdc recommended, 12 Vdc maximum
Internal shunt calibration (R-Cal): 80% FSO $\pm 1.0\%$
Insulation resistance: 1,000 megohms at 50 Vdc


Temperature Characteristics

Transducer diaphragm:
Maximum diaphragm temperature: 750°F (400°C)
Zero shift due to temperature change: 20 psi/100°F maximum (37 psi/100°C)

Electronics housing:
Maximum temperature: 250°F (121°C)
Zero shift due to temperature change: 0.05% full scale/°F maximum (0.10% full scale/°C)
Sensitivity shift due to temperature change: 0.02% full scale/°F maximum (0.04% full scale/°C)

DYNISCO MODEL PT467E-M10

Small Diameter Diaphragm Melt Pressure Transducer for Space Restricted Areas

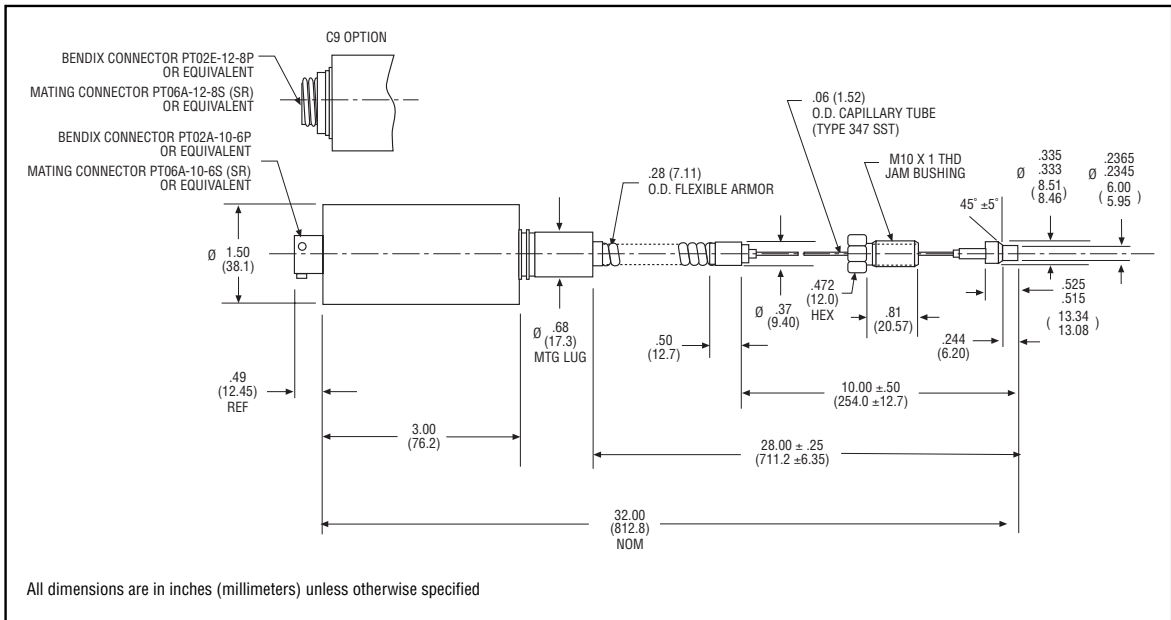

Ordering Guide

Model	Pressure Range (psi)		Exposed Capillary		Flexible Armor	
	Code	Range	Code	Length	Code	Length
PT467E - M10	5M	0 - 5,000	10	10"	18	18"
	7.5M	0 - 7,500				
	10M	0 - 10,000				

Ordering Example: PT467E - M10 - 5M - 10/18

- Mating connector P/N711600 or 6 - pin cable assembly sold separately.

Delivery

Please call for specific delivery information.